


DIS-300

Ethernet Port Distributor

V1.2.0

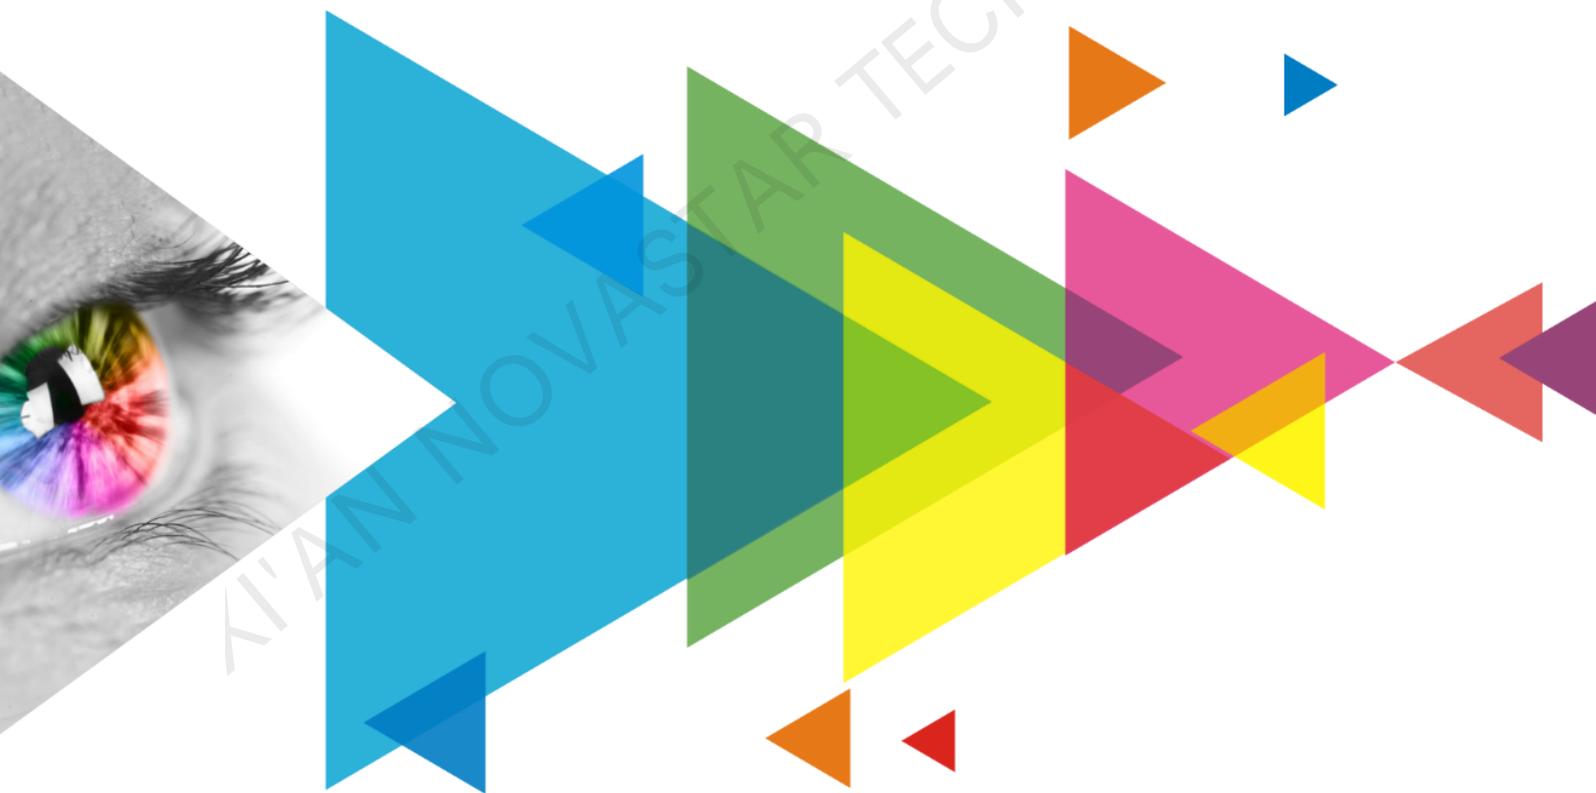

Specifications

Change History

Document Version	Release Date	Description
V1.2.0	2021-02-06	<ul style="list-style-type: none"> Updated the appearance diagrams. Updated the dimensions diagram. Added the certification information.
V1.1.1	2020-09-30	<ul style="list-style-type: none"> Updated the document template. Optimized the product introduction. Optimized the feature description. Optimized the legends in the appearance diagram. Optimized the indicator description. Optimized the dimensions diagram.
V1.1.0	2018-07-30	Updated the document style and content.

Introduction

The DIS-300 is an Ethernet port distributor developed by NovaStar. Featuring 2x Ethernet inputs and 8x Ethernet outputs, it supports two working modes: 1 in 8 out, or 2 in 4 out. It can be mainly used in the fixed installation and rental applications with multiple small and medium-sized displays, such as banks, shopping malls and securities companies.

Features

- 2x Gigabit Ethernet inputs and 8x Gigabit Ethernet outputs
- Switching between the 1 in 2 out and 2 in 4 out working modes
- Input capacity up to 1,300,000 pixels (2 in 4 out mode)
- Reading back data from the receiving card

Appearance

Front Panel



Rear Panel




Connector Type	Connector Name	Description
Input	A/B	Gigabit Ethernet ports, input capacity of each up to 650,000 pixels Input capacity of two ports in total up to 1,300,000 pixels in 2 in 4 out mode

Connector Type	Connector Name	Description
Output	A1~A8 B1~B4	Gigabit Ethernet ports, output capacity of each up to 650,000 pixels <ul style="list-style-type: none"> In 1 in 8 out mode, port A corresponds to ports A1~A8. In 2 in 4 out mode, port A corresponds to ports A1~A4 and port B corresponds to ports B1~B4.
Power	-	AC 100V~240V, 50Hz/60Hz

Indicators

Indicator	Color	Status	Description
Running indicator	Green	Flashing twice every 1s	The input port has been accessed to the system.
		Always on	The input port has not been accessed to the system.
Power indicator	Red	Always on	The power supply is normal.

Dimensions

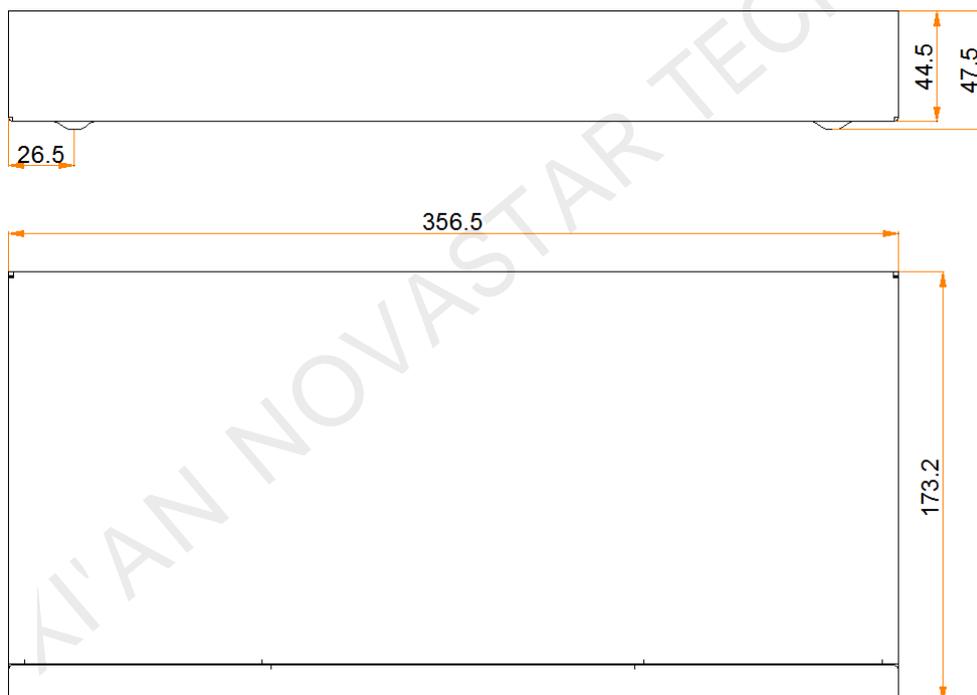

Tolerance: ± 0.3 Unit: mm

Specifications

Electrical Specifications	Input voltage	AC 100V~240V
	Rated power consumption	20 W
Operating Environment	Temperature	-20°C to +60°C
	Humidity	0% RH to 90% RH, non-condensing

Physical Specifications	Dimensions	356.5 mm × 173.2 mm × 47.5 mm
	Net weight	1.05 kg
Packing Information	Packing box	390.0 mm × 250.0 mm × 85.0 mm
	Accessory box	295.0 mm × 83.0 mm × 35.0 mm Accessory: 1x Power cord
Certifications	CE, RoHS	

XI'AN NOVASTAR TECH CO., LTD

Copyright © 2021 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

Trademark

NOVA STAR is a trademark of Xi'an NovaStar Tech Co., Ltd.

Statement

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

[Official website](http://www.novastar.tech)
www.novastar.tech

[Technical support](mailto:support@novastar.tech)
support@novastar.tech